


PC EXHIBIT H

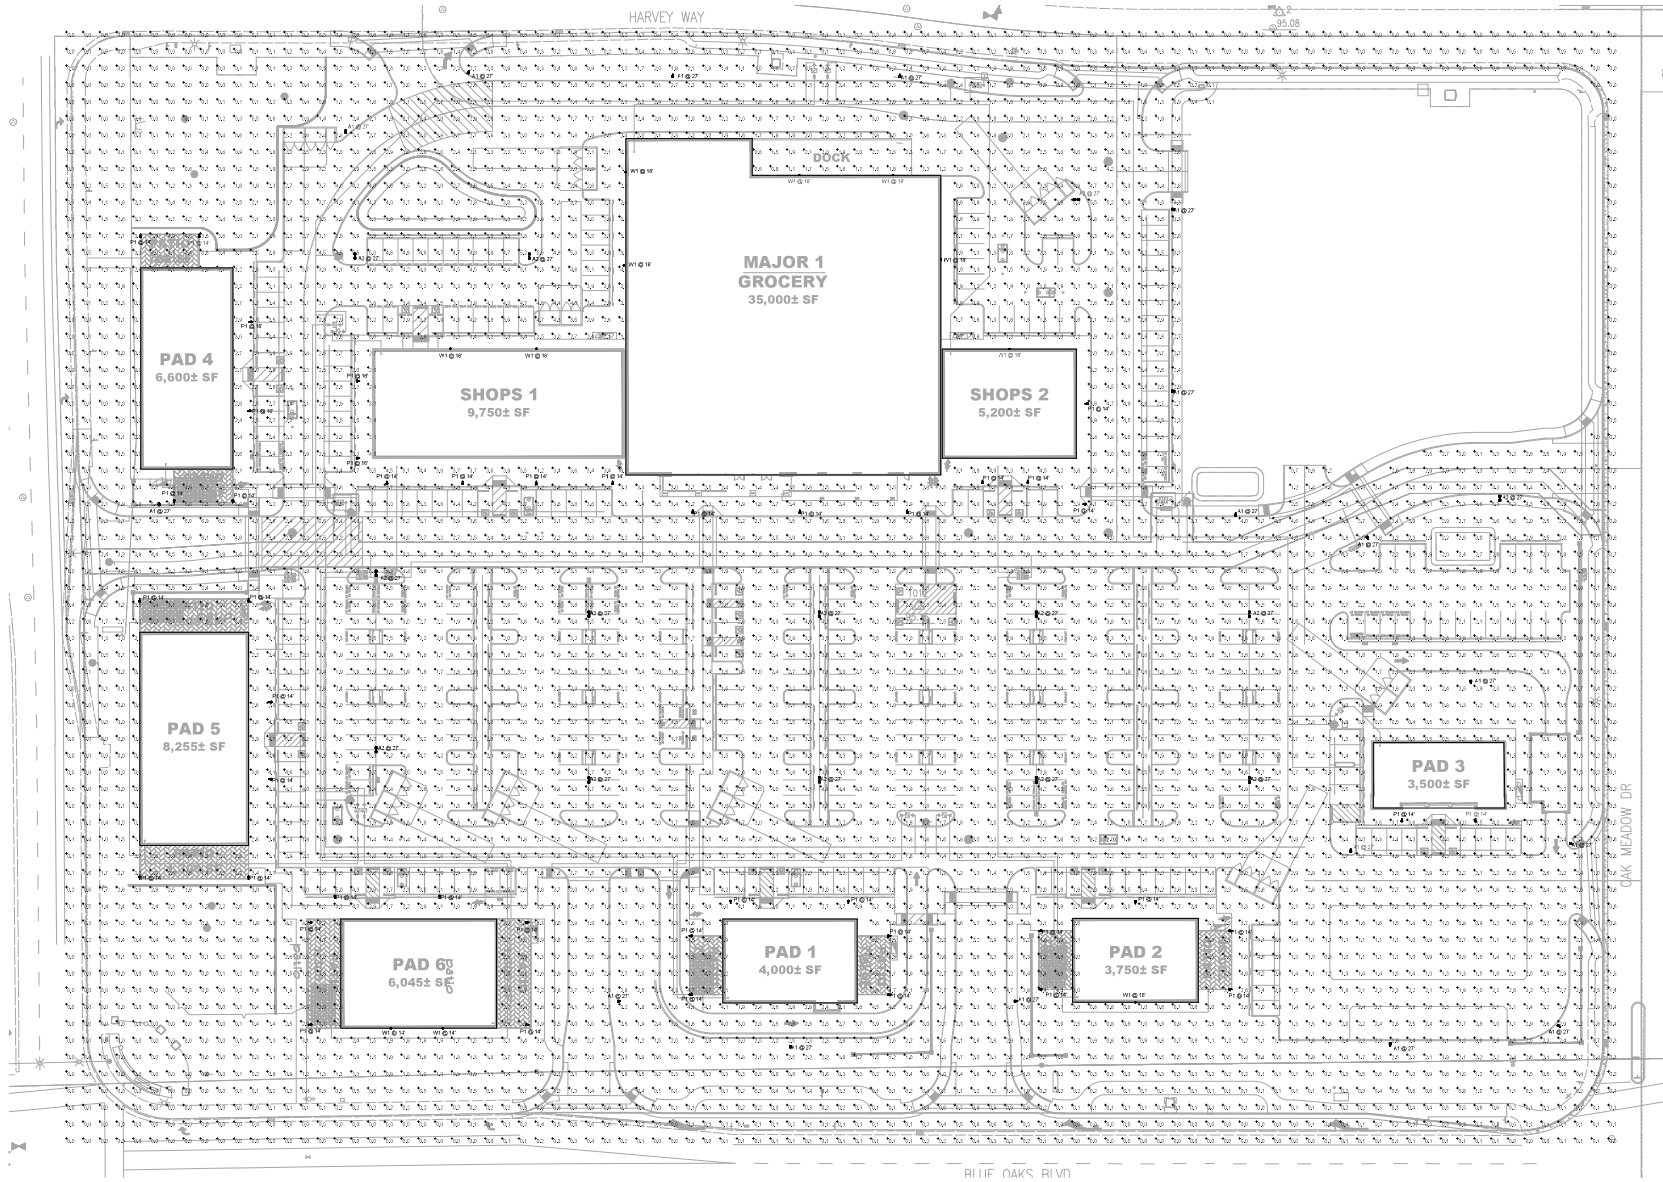


Statistics					
Description	Symbol	Avg	Max	Min	Max/Min
Site	+	2.1 f	7.3 f	0.0 f	N/A

DATE: 05/04/2020
MOG JOB #: 19102.01

DATE	REVISIONS

© MGS ARCHITECTS 2019. ALL RIGHTS RESERVED.
NOTES: This information is conceptual in nature and is subject to adjustment pending further verification and Client, Tenant, and Governmental agency approvals. No warranties or guarantees of any kind are given or implied by the Architect.

SITE LIGHTING
PHOTOMETRIC PLAN




BLUE OAKS PLAZA
ROSEVILLE, CA 95744

250 Sutter Street, Suite 600
San Francisco, California 94108-4481
① 415.574.0802 ② 415.574.1000
mgsarchitects.com



Schedule											
Symbol	Label	Quantity	Manufacturer	Catalog Number	Description	Lamp	Number Lamps	File Name	Lumens Per Lamp	Light Loss Factor	Wattage
	A2	14	EATON-MSGRAV-EDISON (FORMER COOPER LIGHTING)	GLEDHAF-034-LED-E1-T3	GALLERIE AREA AND ROADWAY LUMINAIRE (3) 70 CRI 4000K 1000mA LIGHTSQUARES WITH 16 LEDS EACH AND TYPE III OPTICS Retail, Roadway, Sidewalk, Site, Street, Substation, Security, Corrosion Resistant, Vandal Resistant, Wet Location ABSOLUTE PHOTOMETRY IS BASED ON CALIBRATION FACTORS CREATED USING LAB LUMEN STANDARDS IN GONIOPHOTOMETER WITH TEST DISTANCE OF 28.75 FEET		48	GLEDHAF-034-LED-E1-T3.mlx	388	0.91	332
		17	EATON-MSGRAV-EDISON (FORMER COOPER LIGHTING)	GLEDHAF-034-LED-E1-T3	GALLERIE AREA AND ROADWAY LUMINAIRE (3) 70 CRI 4000K 1000mA LIGHTSQUARES WITH 16 LEDS EACH AND TYPE III OPTICS Retail, Roadway, Sidewalk, Site, Street, Substation, Security, Corrosion Resistant, Vandal Resistant, Wet Location ABSOLUTE PHOTOMETRY IS BASED ON CALIBRATION FACTORS CREATED USING LAB LUMEN STANDARDS IN GONIOPHOTOMETER WITH TEST DISTANCE OF 28.75 FEET		48	GLEDHAF-034-LED-E1-T3.mlx	388	0.91	166
	A1										
		44	EATON-INVUE (FORMER COOPER LIGHTING)	EMAL034-LED-E1-MMD	EPIC MODERN MEDIUM DECORATIVE LED LUMINAIRE (3) LIGHTSQUARES WITH ADJUSTED OPTICS-TYPE 5 SQUARE MEDIUM	(B3) 4000K CCT, 70 CRI LEDS ABSOLUTE PHOTOMETRY IS BASED ON CALIBRATION FACTORS CREATED USING LAB LUMEN STANDARDS IN GONIOPHOTOMETER WITH TEST DISTANCE OF 28.75 FEET Hospitality, Hotel, Industrial, Institutional, Library, Manufacturing, Office, Parking, Parks, Pathway, Pedestrian, Prison, Recreation, Residential, Retail, Roadway, Sidewalk, Site, Street, Substation, Utility Walkway, Warehouse, Wet Location	63	EMAL034-LED-E1-MMD.mlx	145	0.91	75.2
	P1										
		11	EATON-MSGRAV-EDISON (FORMER COOPER LIGHTING)	BSAF-1004-LED-E1-TW	IMPACT ELITE LED QUARTER SPHERE LUMINAIRE LIGHT SQUARE WITH ACCU-LED OPTICS-TYPE IV MDE	(16) 4000K CCT, 70 CRI LEDS Wet Location ABSOLUTE PHOTOMETRY IS BASED ON CALIBRATION FACTORS CREATED USING LAB LUMEN STANDARDS IN GONIOPHOTOMETER	16	BSAF-1004-LED-E1-TW.mlx	369	0.91	54.8
	W1										

LIGHT FIXTURE SCHEDULE



BLUE OAKS PLAZA
ROSEVILLE, CA 95744

228 Sutter Street, Suite 600
San Francisco, California 94102-4461
☎ 415.974.0802 ☎ 415.974.1000
mcp@mcgarchitects.com



FIG. 7

CONCENTRATIONS

HOUSE

NO SECTION

SHED

MOUNTING CRIPION

POWER AND LINERS BY BAR COUNT (7 LBS. LIGHTBARE)

Power	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80	82	84	86	88	90	92	94	96	98	100																																																																																														
Power (Watts)	200W	250W	300W	350W	400W	450W	500W	550W	600W	650W	700W	750W	800W	850W	900W	950W	1000W	1050W	1100W	1150W	1200W	1250W	1300W	1350W	1400W	1450W	1500W	1550W	1600W	1650W	1700W	1750W	1800W	1850W	1900W	1950W	2000W	2050W	2100W	2150W	2200W	2250W	2300W	2350W	2400W	2450W	2500W																																																																																													
Power (HP)	0.27	0.34	0.41	0.48	0.55	0.62	0.69	0.76	0.83	0.90	0.97	1.04	1.11	1.18	1.25	1.32	1.39	1.46	1.53	1.60	1.67	1.74	1.81	1.88	1.95	2.02	2.09	2.16	2.23	2.30	2.37	2.44	2.51	2.58	2.65	2.72	2.79	2.86	2.93	3.00	3.07	3.14	3.21	3.28	3.35	3.42	3.49	3.56	3.63	3.70	3.77	3.84	3.91	3.98	4.05	4.12	4.19	4.26	4.33	4.40	4.47	4.54	4.61	4.68	4.75	4.82	4.89	4.96	5.03	5.10	5.17	5.24	5.31	5.38	5.45	5.52	5.59	5.66	5.73	5.80	5.87	5.94	6.01	6.08	6.15	6.22	6.29	6.36	6.43	6.50	6.57	6.64	6.71	6.78	6.85	6.92	6.99	7.06	7.13	7.20	7.27	7.34	7.41	7.48	7.55	7.62	7.69	7.76	7.83	7.90	7.97	8.04	8.11	8.18	8.25	8.32	8.39	8.46	8.53	8.60	8.67	8.74	8.81	8.88	8.95	9.02	9.09	9.16	9.23	9.30	9.37	9.44	9.51	9.58	9.65	9.72	9.79	9.86	9.93	10.00
Power (kW)	0.27	0.34	0.41	0.48	0.55	0.62	0.69	0.76	0.83	0.90	0.97	1.04	1.11	1.18	1.25	1.32	1.39	1.46	1.53	1.60	1.67	1.74	1.81	1.88	1.95	2.02	2.09	2.16	2.23	2.30	2.37	2.44	2.51	2.58	2.65	2.72	2.79	2.86	2.93	3.00	3.07	3.14	3.21	3.28	3.35	3.42	3.49	3.56	3.63	3.70	3.77	3.84	3.91	3.98	4.05	4.12	4.19	4.26	4.33	4.40	4.47	4.54	4.61	4.68	4.75	4.82	4.89	4.96	5.03	5.10	5.17	5.24	5.31	5.38	5.45	5.52	5.59	5.66	5.73	5.80	5.87	5.94	6.01	6.08	6.15	6.22	6.29	6.36	6.43	6.50	6.57	6.64	6.71	6.78	6.85	6.92	6.99	7.06	7.13	7.20	7.27	7.34	7.41	7.48	7.55	7.62	7.69	7.76	7.83	7.90	7.97	8.04	8.11	8.18	8.25																									

[illegible]

DECOMPOSITIVE POLES