

LED recessed ceiling downlights
with symmetrical light distribution

A new series of LED recessed ceiling mounted downlights available in a variety of housing sizes, light distributions, and light outputs. Interior silicone optic allows for superior light control. These luminaires are designed for down lighting atriums, canopies, passages and other interior and exterior locations featuring symmetrical narrow or wide beam distributions.

Die-cast aluminum housing and trim ring · Clear safety glass · Silicone optical lens · Reflector surface made of pure anodized aluminum


LED color temperature 3000 K – for 4000 K add suffix **K4**

These impressive luminaires have a selection of color temperatures, boast a minimum service life of 50,000 hours, and are guaranteed to last with the BEGA 20 Year Replacement Promise for LED modules, see page 415.

Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com.

BEGA luminaires are provided with polyester powder coat finish in four standard colors – Black, White, Bronze, or Silver. These luminaires are optionally available in RAL and custom colors.

UL or CSA listed, suitable for wet locations · Protection class IP 65



Recessed ceiling downlights · narrow beam

	LED	β	A	B	C
24817	8.3 W	21°	5 5/8"	5	18
24820	16.8 W	21°	5 5/8"	5	18
24818	11.5 W	16°	6 7/8"	5	18
24821	24.5 W	16°	6 7/8"	5	18
24819	17.3 W	20°	8 1/2"	5	18
24822	36.0 W	20°	8 1/2"	5	18

Recessed ceiling downlights · wide beam

	LED	β	A	B	C
24823	8.3 W	38°	5 5/8"	5	18
24826	16.8 W	38°	5 5/8"	5	18
24824	11.5 W	29°	6 7/8"	5	18
24827	24.5 W	29°	6 7/8"	5	18
24825	17.3 W	32°	8 1/2"	5	18
24828	36.0 W	32°	8 1/2"	5	18

Recessed ceiling downlights · very wide beam

	LED	β	A	B	C
24829	8.3 W	59°	5 5/8"	5	18
24832	16.8 W	59°	5 5/8"	5	18
24830	11.5 W	56°	6 7/8"	5	18
24833	24.5 W	56°	6 7/8"	5	18
24831	17.3 W	56°	8 1/2"	5	18
24834	36.0 W	56°	8 1/2"	5	18

β = Beam angle





One-sided

Two-sided



LED wall washers
with shielded light in one or two directions

A series of LED wall washer luminaires with light output in one or two directions. These luminaires are ideally suited for the even illumination of vertical mounting surfaces. Arranged individually or in groups, they are great design elements for a host of lighting applications.



Die-cast aluminum · Safety glass · Reflector made of pure anodized aluminum
LED color temperature 3000 K – for 4000 K add suffix **K4**

These impressive luminaires have a selection of color temperatures, boast a minimum service life of 50,000 hours, and are guaranteed to last with the BEGA 20 Year Replacement Promise for LED modules, see page 415.

Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com.

BEGA luminaires are provided with polyester powder coat finish in four standard colors – Black, White, Bronze, or Silver. These luminaires are optionally available in RAL and custom colors.

UL or CSA listed, suitable for wet locations · Protection class IP 64




Light emission on one side				
	LED	A	B	C
24 370	8.4 W	4¼	5¼	5½
Light emission on two sides				
	LED	A	B	C
24 371	16.8 W	4¼	5¼	5½



Drive-over LED in-grade luminaires
High performance floodlights and luminaires

Pressure loads	2200 lbs.
Material	Stainless steel · aluminum
Protection class	IP 67
Installation depth	5 inch
Length	20 7/8 - 39 1/2 inch

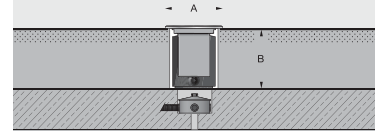

Drive-over LED in-grade luminaires
High performance floodlights and luminaires

A series of linear LED in-grade floodlights with symmetrical or asymmetrical light distribution. The symmetrical floodlights are ideal for up-lighting canopies or landscape details. The asymmetrical floodlights are ideal for illuminating signage and building facades. This family of luminaires is also available with RGBW color mixing technology. These luminaires are designed to bear pressure loads up to 2200 lbs. from vehicles with pneumatic tires. The luminaires must not be used for traffic lanes where they are subject to horizontal pressure from vehicles braking, accelerating and changing direction.

Aluminum housing · Stainless steel luminaire housing and faceplate · Matte safety glass · Aluminum reflector with high gloss coating

LED color temperature 4000K – for 3000K add suffix **K3**


RGBW units are DMX and RDM compatible

These impressive luminaires have a selection of color temperatures, boast a minimum service life of 50,000 hours, and are guaranteed to last with the BEGA 20 Year Replacement Promise for LED modules, see page 415.

Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com.

Luminaires are provided with #4 brushed stainless steel finish.

UL or CSA listed, suitable for wet locations · Protection class IP 67



Symmetrical · Floodlights

	LED	A	B
77915	19.8W	20 7/8 x 3 1/2	5
77916	39.6W	39 1/2 x 3 1/2	5

Symmetrical · Floodlights RGBW

	LED	A	B
77849	36.4W	39 1/2 x 3 1/2	5

Asymmetrical · Floodlights

	LED	A	B
77917	19.8W	20 7/8 x 3 1/2	5
77918	39.6W	39 1/2 x 3 1/2	5

Asymmetrical · Floodlights RGBW

	LED	A	B
77843	36.4W	39 1/2 x 3 1/2	5





LED garden and pathway luminaires for the Home & Garden
with shielded light

A series of LED pathway luminaires with shielded light for use in the private sector. These luminaires are ideally suited for garden, entryways, and for many applications on paths and terraces. Anchorage units are available for direct burial in concrete or soil, or with a hardscape base for installation on foundations or paved surfaces.

Die cast and extruded aluminum · Clear safety glass · Galvanized steel anchorage

LED color temperature 3000 K

These impressive luminaires have a selection of color temperatures, boast a minimum service life of 50,000 hours, and are guaranteed to last with the BEGA 20 Year Replacement Promise for LED modules, see page 415.

Luminaires in this series require a remote 12V AC magnetic power supply suitable to operate the intended LED wattage, see page 411.


Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com.

BEGA luminaires are provided with polyester powder coat finish in two standard colors – Black and Bronze

UL or CSA listed, suitable for wet locations · Protection class IP 65




Shielded light





Direct burial anchorage

Hardscape base



		LED	A	B	C	D
77 265	with direct burial anchorage	4.2W	3 ½	27 ½	2	-
77 266	with hardscape base	4.2W	3 ½	27 ½	2	3 ½



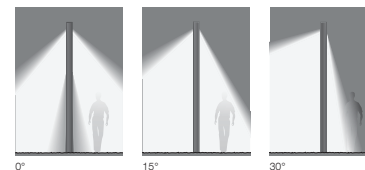

LED light building element
with adjustable light distribution

A series of LED light building elements with adjustable light distribution. An internal adjusting device allows the optical system to be adjusted from 0°, 15° and 30° on either side of the luminaire. Light building elements are luminous design features for public areas. They are ideally suited for delineating and structuring interior and exterior spaces such as landscape areas, plazas, building entrances and atria.

Die-cast and extruded aluminum · Clear safety glass · Reflector made of pure anodized aluminum · Anchorage unit made of galvanized steel


LED color temperature 4000 K – for 3000 K add suffix **K3**

These impressive luminaires have a selection of color temperatures, boast a minimum service life of 50,000 hours, and are guaranteed to last with the BEGA 20 Year Replacement Promise for LED modules, see page 415.

Further LED technical data including luminous flux, CRI, dimming and electrical characteristics are provided on the individual luminaire specification sheets, available at www.bega-us.com.

BEGA luminaires are provided with polyester powder coat finish in four standard colors – Black, White, Bronze, or Silver. These luminaires are optionally available in RAL and custom colors.

UL or CSA listed, suitable for wet locations · Protection class IP 65



	LED	A	B	C	Anchorage
99075	50.6W	15¼x7	85½	177½	79814




AVANT GARDE Exterior Sconces
 WS-W17909 / WS-W17912 / WS-W17917

Fixture Type: _____


Catalog Number: _____

Project: _____


Location: _____



WS-W17909



WS-W17912



WS-W17917

PRODUCT DESCRIPTION

Classic lantern profile artfully expressed in black lines. A clear mouth blown glass element within reveals a spectral reference to an Edison filament lamp of old. A contemporary art piece idea for welcoming friends and family in entryways and lobbies in residential and hospitality venues.

FEATURES

- Mouth-blown grooved etched glass
- Weather-resistant powder coat
- Dimmer: ELV, TRIAC, 0-10V
- Universal Driver (120-277V)
- Rated Life: 50,000 hours
- Color temp: 3000K
- CRI: 90

SPECIFICATIONS


Construction: Aluminum

Light Source: High output LED

Finish: Black (BK)

Standards: ETL & cETL Wet Location listed

ORDER NUMBER

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-W17909	9W		343	242	BK <i>Black</i> 
WS-W17912	12.5W	120V-277V	555	426	
WS-W17917	17.5W		610	503	

Example: **WS-W17909-BK**

modernforms.com
 Phone (866) 810.6615
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760