


DC EXHIBIT I



CLOUD DANCE DRIVE

BLUE OAKS BOULEVARD

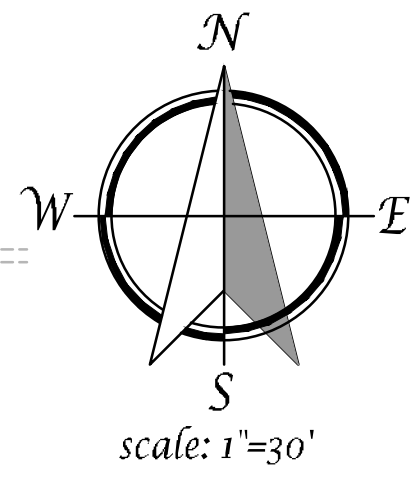

E1.0 SITE PLAN - LIGHTING

WINDING CREEK APARTMENTS - ROSEVILLE


3338 Blue Oaks Blvd, Roseville, California

Proposed By: **Anthem United**
Anthem United
3001 Douglas Blvd
Roseville, CA 95661

FEBRUARY 8, 2022
COORDINATION SUBMITTAL

CAPITOL CITY DESIGN, INC.
Electrical Engineering Consultants
1751 Cebrarian Street
West Sacramento, CA 95691
916.375.0135 www.capcitydesign.com

DC EXHIBIT I

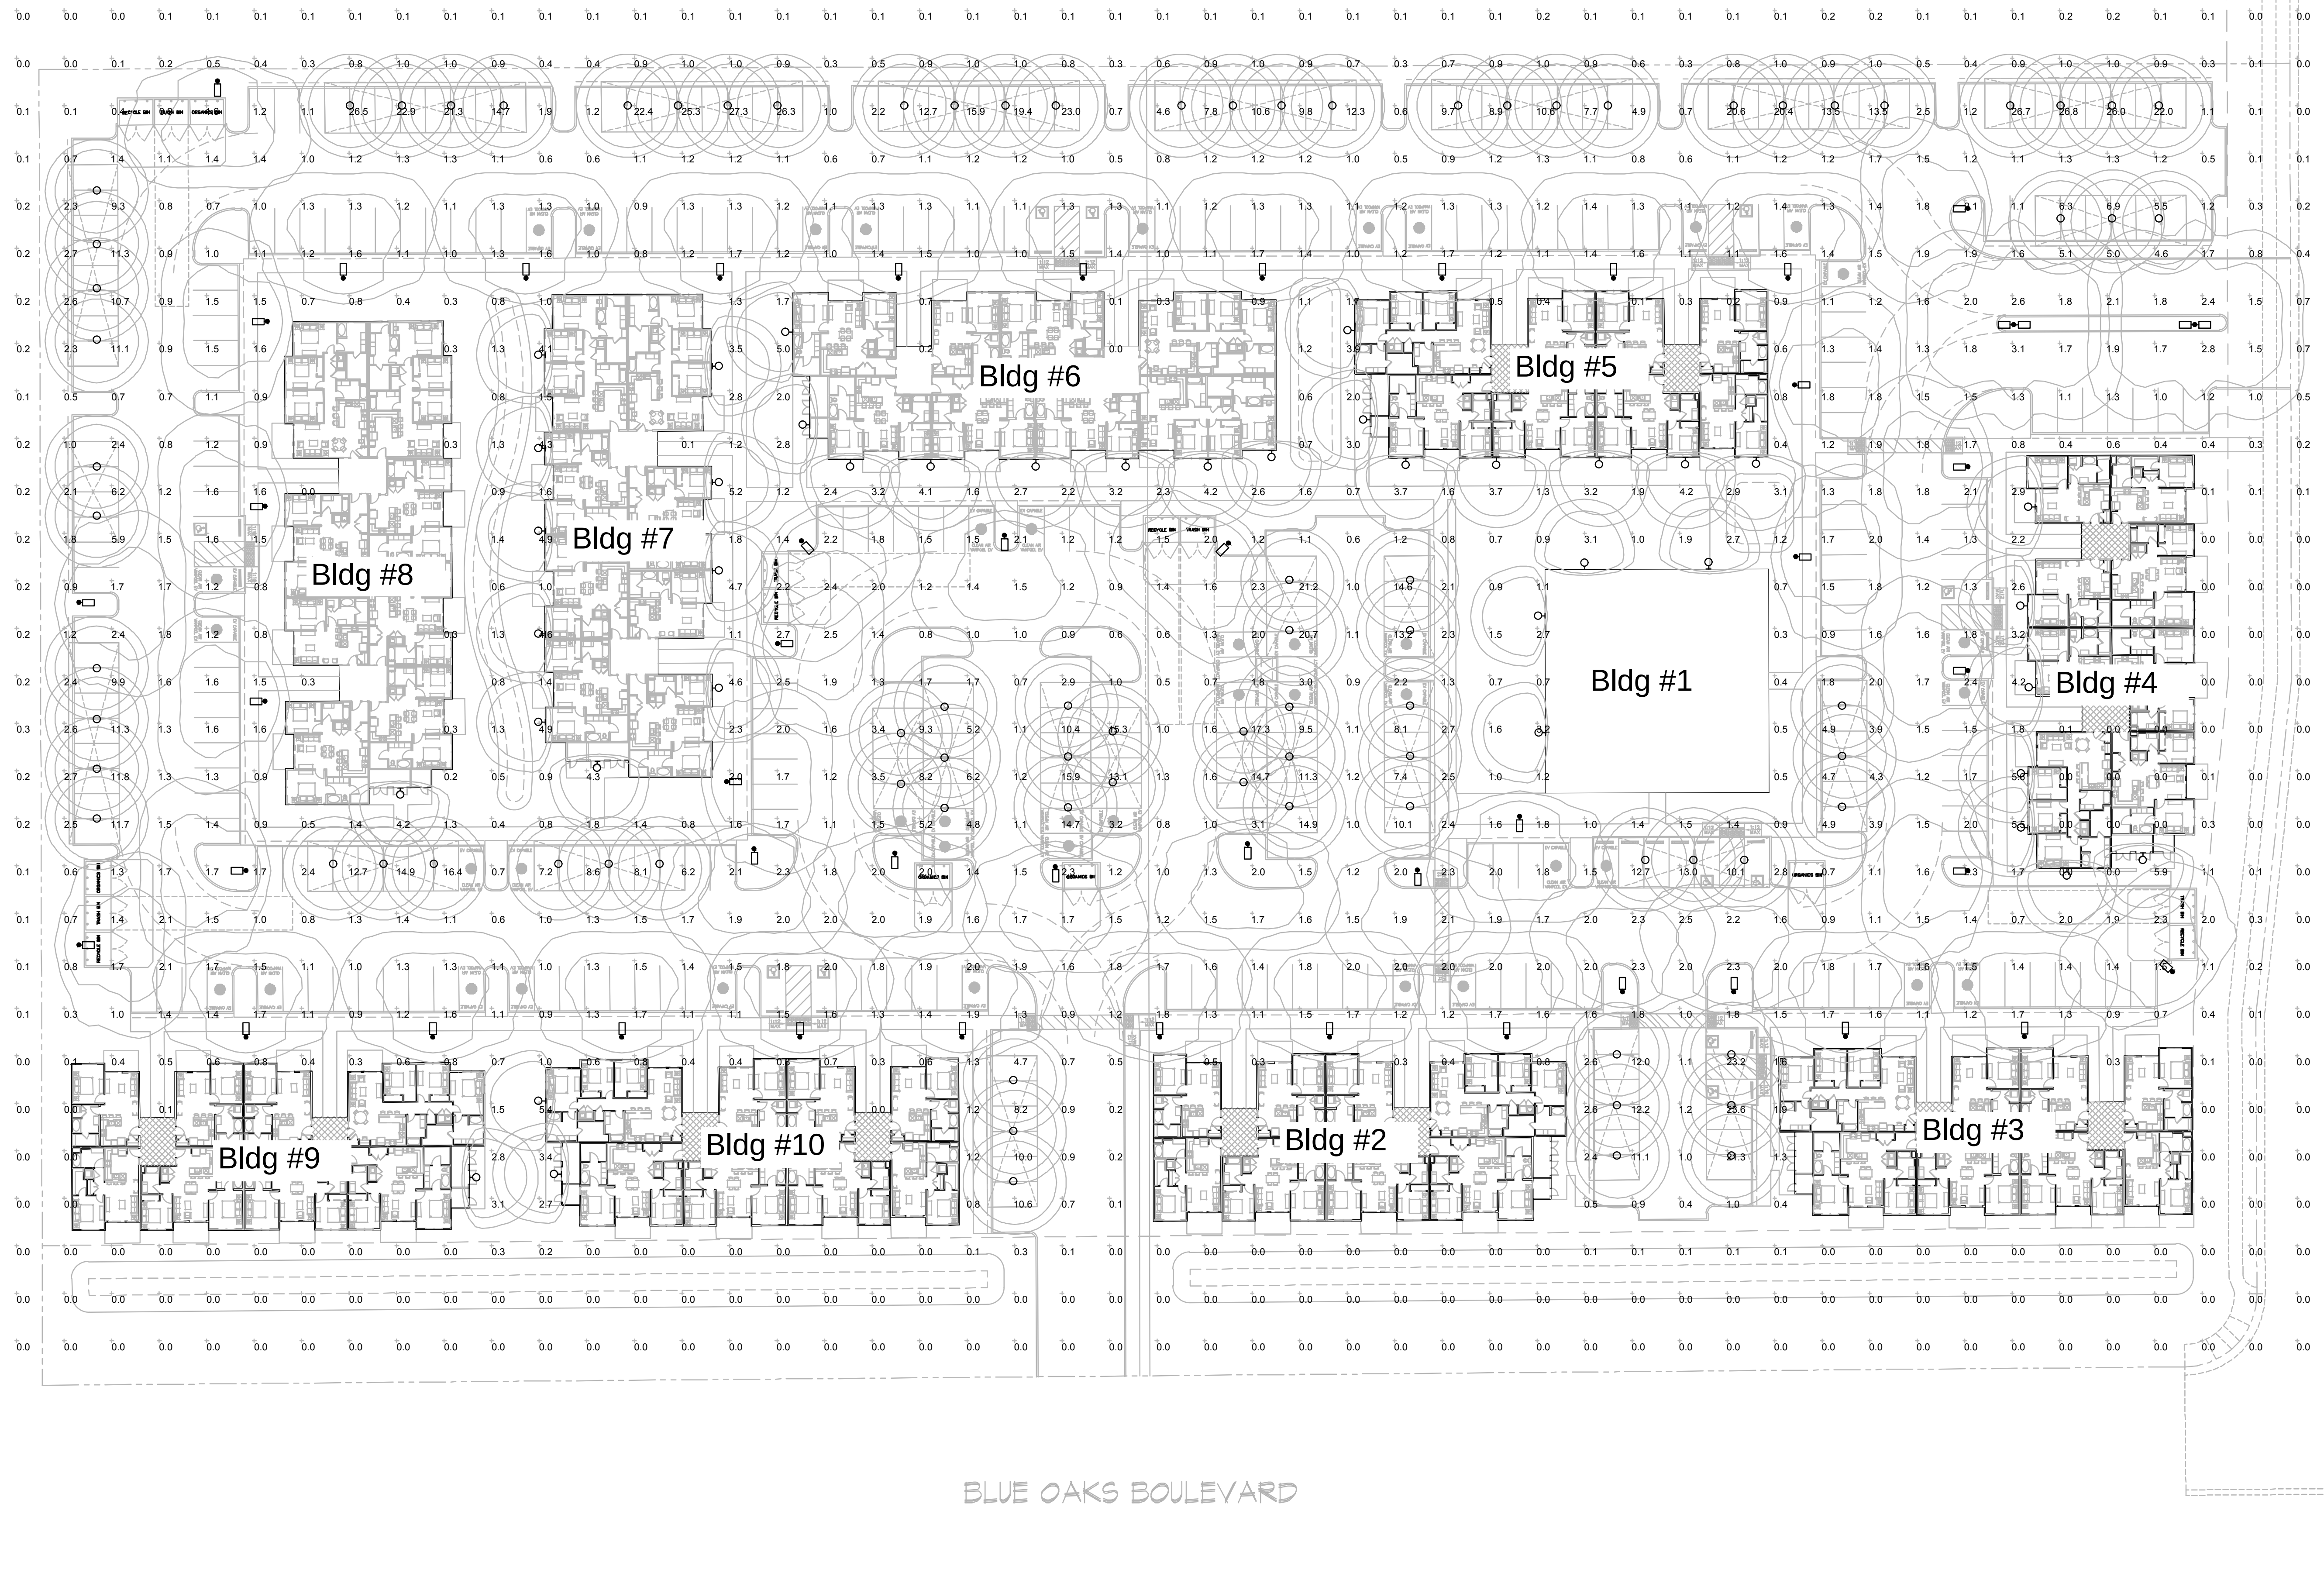

E1.1 SITE PLAN - PHOTOMETRIC

WINDING CREEK APARTMENTS - ROSEVILLE

3338 Blue Oaks Blvd, Roseville, California

Proposed By: **Anthem United**
3001 Douglas Blvd
Roseville, CA 95661

FEBRUARY 8, 2022
COORDINATION SUBMITTAL

CAPITOL CITY DESIGN, INC.
Electrical Engineering Consultants
1751 Cebrarian Street
West Sacramento, CA 95691
916.375.0135 www.capcitydesign.com

LIGHTING FIXTURE SCHEDULE							SYMBOLS LIST	
TYPE	DESCRIPTION	MANUFACTURER & CATALOG NUMBER	LAMPS	VA	MOUNTING	REMARKS	SYMBOL	DESCRIPTION
W	LED WALL PACK	LITHONIA WDGE2 LED P3 40K 90CRI VF MVOLT SRM PIR1FC3V DDBXD (E10WH FOR EMERGENCY)	LED 4000K	23	WALL MOUNTED +12" -0"	PROVIDE WITH MOTION AND AUTO DIM	○ ◻ ○ ◻ X A	LIGHTING FIXTURE, SURFACE OR PENDANT MOUNTED IN CEILING LIGHTING FIXTURE, RECESSED MOUNTED IN CEILING LIGHTING FIXTURE, SURFACE MOUNTED ON WALL LIGHTING FIXTURE, MOUNTED ON POLE WITH SINGLE/DOUBLE HEADS LIGHTING FIXTURE, MOUNTED ON POLE (POST-TOP HEAD) FIXTURE TAG - 'A' DENOTES FIXTURE TYPE, SEE LIGHTING FIXTURE SCHEDULE
S1	POLE MOUNTED FIXTURE SINGLE HEAD N/ HOUSE SIDE SHIELD	LITHONIA DSX0 LED P1 40K TFTM MVOLT SPA PIRH HS DDBXD	LED 4000K	30	POLE MOUNTED +10" -0"	PROVIDE WITH AUTO DIMMING TO 50% & MOTION CONTROL		
S2	POLE MOUNTED FIXTURE DOUBLE HEAD N/ HOUSE SIDE SHIELD	LITHONIA DSX0 LED P1 40K TFTM MVOLT SPA PIRH HS DDBXD	LED 4000K	76	POLE MOUNTED +10" -0"	PROVIDE WITH AUTO DIMMING TO 50% & MOTION CONTROL		
S3	CANOPY LIGHT	LITHONIA CNYLED P1 40K MVOLT DDB	LED 4000K	95	SURFACE	PROVIDE WITH AUTO DIMMING TO 50% & MOTION CONTROL		

ABBREVIATIONS	
AFF	ABOVE FINISHED FLOOR
C	CONDUIT
CL6	CEILING
(E)	EXISTING
EM	DENOTES EMERGENCY FIXTURE. PROVIDE WITH 90-MINUTE BATTERY BACK-UP BALLAST, SEE LIGHTING PLANS FOR LOCATIONS AND QUANTITIES.
GFCI	GROUND FAULT CIRCUIT INTERRUPT
I6	ISOLATED GROUND
MP4S	SEE MECHANICAL PLANS & SPECIFICATIONS
MT	EMPTY CONDUIT WITH NYLON PULL ROPE
(N)	NEN
NIES	NOT IN ELECTRICAL SECTION OF THESE PLANS & SPECIFICATIONS
NL	NIGHT LIGHT - FIXTURE TO BE UNSWITCHED
PFB	PROVISION FOR FUTURE BREAKER
PAL	PANELBOARD
(R)	RELOCATED
TTB	TELEPHONE TERMINAL BOARD
(TYP)	TYPICAL
UG	UNDERGROUND
UCN	UNLESS OTHERWISE NOTED
NP	WEATHERPROOF, RECEPTACLE COVERS SHALL BE "WEATHERPROOF WHILE IN USE". (CEC 406.9)



D-Series Size 0 LED Area Luminaire



Specifications

EPA: 0.95 ft² (0.09 m²)

Length: 26" (660 mm)

Width: 13" (330 mm)

Height: 3" (76 mm)

Weight: 7" (17 mm)

Weight (max): 16 lbs (7.3 kg)

Ordering Information

EXAMPLE: DSX0 LED P6 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

Series	LEDs	Color temperature	Distribution	Voltage	Mounting
DSX0 LED	Forward optics P1 P4 P7 P2 P5 P3 P6 Retained optics P10 P12 P11 P13	30K 3000 K 40K 4000 K 50K 5000 K	T1S Type I short T2S Type II short T3S Type III short T4S Type IV short T5S Type V short T6S Type VI short T7S Type VII short T8S Type VIII short T9S Type IX short T10S Type X short T11S Type XI short T12S Type XII short T13S Type XIII short T14S Type XIV short T15S Type XV short T16S Type XVI short T17S Type XVII short T18S Type XVIII short T19S Type XIX short T20S Type XX short T21S Type XXI short T22S Type XXII short T23S Type XXIII short T24S Type XXIV short T25S Type XXV short T26S Type XXVI short T27S Type XXVII short T28S Type XXVIII short T29S Type XXIX short T30S Type XXX short	120V 208V 240V 277V 347V 480V	Shipped included SPA Square pole mounting RPA Round pole mounting WBA Wall bracket SPDIBA Square pole universal mounting adapter RPAIBA Round pole universal mounting adapter Must use mounting bracket adapter (specify finish)

Control options	Other options	Finish (specify)
Shipped installed NLTAIR2 Light All generation 2 enabled PIRHN Network, high/low motion/ambient sensor PER Network, high/low motion/ambient sensor PER3 Five-pin receptacle only (control ordered separately) PER3 Seven-pin receptacle only (control ordered separately) DMS 0-10V dimming sensor (for use with an external control, ordered separately)	PIR High/low, motion/ambient sensor, 8-12' mounting height, ambient sensor enabled at 36" PIRHN High/low, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 36" PIR1FC3V High/low, motion/ambient sensor, 8-12' mounting height, ambient sensor enabled at 36" PIR1FC3V High/low, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 36" FAD Field adjustable output	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBXD Textured dark bronze DBLXD Textured black DNAXD Textured natural aluminum DWHXD Textured white

LITHONIA LIGHTING COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.705.7378 • www.lithonia.com

DSX0 LED Rev. 08/2019 Page 1 of 8



Contractor Select™

CNY LED Canopy Lighting

The CNY LED canopy luminaires are versatile, energy efficient solutions for surface-mount applications. Available in two sizes, these luminaires can replace a wide range of existing canopy luminaires; anything from CFL to 400W metal halide. An LED array light source coupled with a translucent acrylic lens creates visually comfortable illumination that is far superior to similar products that use a single bright LED and clear lenses. Smooth sides greatly enhance the aesthetic of this product making suitable for wider range of applications than industrial-looking finned products.

FEATURES:

- Energy efficient - Can save up to 80% when replacing metal halide
- LED array light source and translucent lens for visually comfortable illumination
- Quick-mount feature eliminates the need to open luminaire for installation
- DLC Premium listed

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Wattage	CCT	Voltage	Finish	Pallet Qty.
CNY LED P1 40K MVOLT DDB MH	791848093329	CANOPY LUMINAIRE	150W METAL HALIDE	4,500	35W	4000K	120-277V	DARK BRONZE	48
CNY LED P2 40K MVOLT DDB MH	791848093344	CANOPY LUMINAIRE	250W METAL HALIDE	6,600	52W	4000K	120-277V	DARK BRONZE	48

Accessories: Ordered and shipped separately

CNYCP	14 inch x 14 inch Beauty Cover Plate
-------	--------------------------------------

Contractor Select™ CNY LED

Page 1 of 2



WDGE2 LED Architectural Wall Sconce Visual Comfort Optic

Specifications

Depth (D1): 7"

Depth (D2): 1.5"

Height: 9"

Width: 11.5"

Weight: 13.5 lbs (without options)

WDGE LED Family Overview

Luminaire	Optics	Standard FLM, 90°	Color Temp., 20°	Mount	Approximate Lumens (4000K, 80CRI)							
					P1	P2	P3	P4	P5	P6		
WDGE1 LED	Visual Comfort	40W	—	—	750	1,200	2,000	—	—	—		
WDGE2 LED	Visual Comfort	10W	10W	Standard / eLight	—	1,200	2,000	3,000	4,500	6,000		
WDGE2 LED	Precision Refractive	10W	10W	Standard / eLight	700	1,200	2,000	3,200	4,500	—		
WDGE3 LED	Precision Refractive	15W	10W	Standard / eLight	—	2,500	8,500	10,000	12,000	—		
WDGE4 LED	Precision Refractive	—	—	Standard / eLight	—	12,000	16,000	18,000	20,000	22,000	25,000	

Ordering Information

EXAMPLE: WDGE2 LED P3 40K 80CRI VF MVOLT SRM DDBXD

Series	Package	Color Temperature	CR	Distribution	Voltage	Mounting	Shipped included	Shipped separately
WDGE2 LED	P1 P2 P3 P4 P5	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	80CRI 90CRI	VF Visual comfort forward throw VW Visual comfort wide	347V 480V	Shipped included SRM Surface mounting bracket ICW Indirect Canopy Ceiling WBR Weather bracket (dry/damp locations only)	Shipped separately ABS 3-Branch Architectural wall spacer PSBW 5-Branch mounted back box (top, left, right conduit entry). Use when there is no junction box available.	

Options

Options	Standard Sensors/Controls	Finish
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (90V, 90V, 100V)	PIR Bi-level (100/25%) motion sensor for 8-12' mounting heights. Intended for use on switched circuits with external dusk-to-dawn switching.	DDBXD Dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIRHN Bi-level (100/25%) motion sensor for 15-30' mounting heights. Intended for use on switched circuits with external dusk-to-dawn switching.	DBLXD Black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD White
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DNAXD Textured natural aluminum
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DWHXD Textured white
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 8-12' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DDBXD Textured dark bronze
E40H Emergency battery backup, Certified in CA Title 20 MAEDBS (100V, 100V)	PIR1FC3V Bi-level (100/25%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk-to-dawn operation.	DBLXD Textured black
E40H Emergency battery backup, Certified in CA Title 20 MA		